



# DAMEN COMBI FREIGHTER<sup>®</sup> 3850

"M.V. AMMON"

## GENERAL

YARD NUMBER	9351
DELIVERY DATE	October 2005
BASIC FUNCTIONS	Transport of bulk, steel coils, containers, forest products, general cargo, etc.
CLASSIFICATION	Lloyds Register * 100 A1, * LMC, UMS, SCM Equipped for dangerous goods according to SOLAS reg. 54 II2, excl. Class I and VII. Strengthened for heavy cargo up to 15 t/m <sup>2</sup>
IMO NO.	931.9428

## DIMENSIONS

LENGTH O.A.	88.60	m
LENGTH B.P.P.	84.99	m
BEAM MLD.	12.50	m
DEPTH	7.00	m
BALLAST DRAFT	3.20	m
SUMMERDRAFT	5.42	m
DEADWEIGHT	ca. 3.800	ton
GROSS TONNAGE	2.545	ton

## CAPACITIES

HOLD CAPACITIES	5.250	m <sup>3</sup> (185.400 cuft)
MDO	210	m <sup>3</sup>
GAS OIL	1.9	m <sup>3</sup>
LUB.OIL CLEAN	8.6	m <sup>3</sup>
DIRTY OIL	4	m <sup>3</sup>
SLUDGE	4	m <sup>3</sup>
SEWAGE	12	m <sup>3</sup>
POTABLE WATER	55	m <sup>3</sup>
BALLAST WATER	1.340	m <sup>3</sup>

CONTAINER CAP. IN HOLD	108	TEU
CONTAINER CAP. ON DECK	80	TEU
TOTAL NUMBER	188	TEU

## PERFORMANCES

Trial speed at ballast draft and 1520 kW output: 12.5 knots

## NAUTICAL AND COMMUNICATION EQUIPMENT

Radio equipment is according to GMDSS for area A3

## PROPULSION SYSTEM

MAIN ENGINE	1x MAK, type 8M 20
OUTPUT	1520 kW at 1000 rpm
PROPELLER	1x FPP, 2600 mm
BOW THRUSTER	FPP, 220 kW

## HATCHES

Weatherdeck hatches dim. approx. 62,70 x 10,10 m  
Steel pontoon hatches with gantry crane

## AUXILIARY EQUIPMENT

- 1 Diesel generator set, Scania, 324 kVA-50Hz
- 1 Diesel generator set, Sisu, 120 kVA-50Hz
- 1 Emergency/harbour generator set, Sisu, 58 kVA-50Hz
- 2 Starting air compressors
- 1 MDO separator
- 1 LO separator
- 2 Fuel oil trim pumps
- 1 Bilge water separator, acc. to Marpol regulations
- 2 General service pumps, each 150 m<sup>3</sup>/hr at 2,3 bar
- 1 Fire fighting pump
- 1 Freshwater pressure set
- 1 CO<sub>2</sub> fire fighting system for engine room and cargo hold

## DECK LAY-OUT AND EQUIPMENT

- 1 Elec. driven bow anchor winch with two warping heads
- 1 Elec. driven capstan aft
- Rudder, fishtail type
- Container fittings in tanktop and on hatch covers
- Lashing eyes in hold and on outside of coaming
- 2 Moveable grain bulkheads with 8 stowage positions
- Electrically driven hold ventilation for 6 air changes per hour


## ACCOMMODATION

For captain and crew for a total of 8 persons with heating, ventilation and air-conditioning

## MANAGING OWNER

'Ammon' managed by Ammon Beheer B.V., Netherlands

**DAMEN**

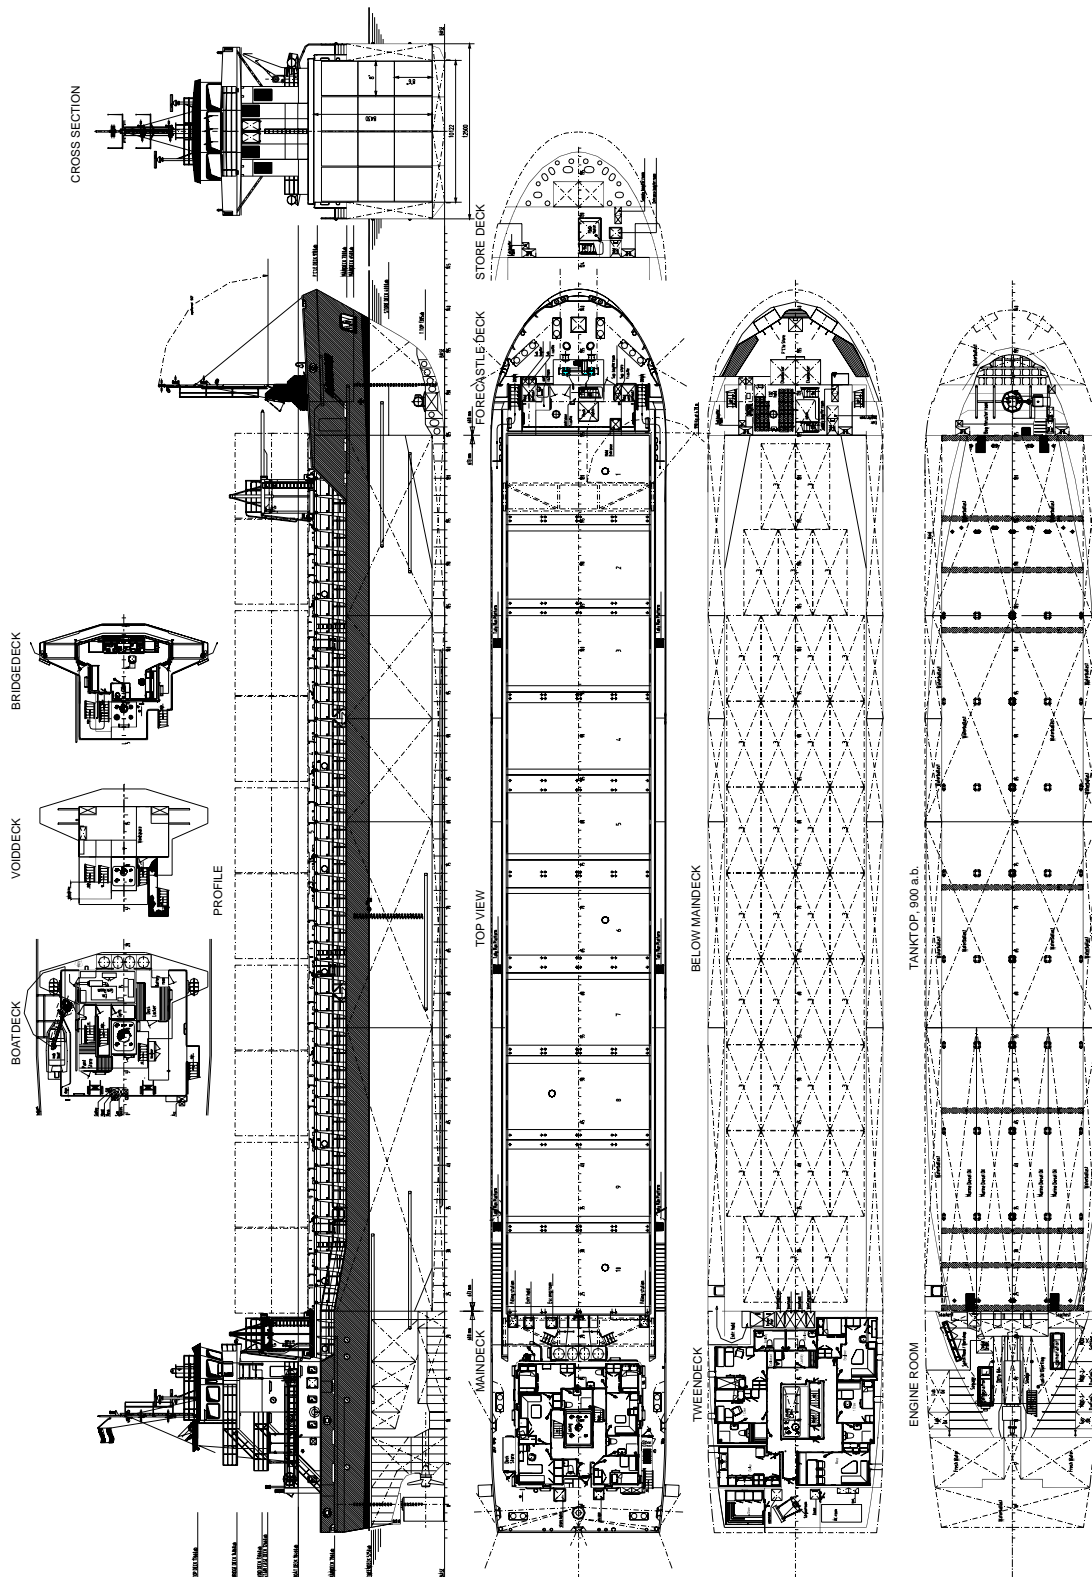

# DAMEN COMBI FREIGHTER® 3850

"M.V. AMMON"

**DAMEN**

DAMEN SHIPYARDS BERGUM

Member of the DAMEN SHIPYARDS GROUP



Damsingel 4 (Industrieterrein Zuid)  
9262 NC Suameer

P.O. Box 7  
9250 AA Bergum  
The Netherlands

phone +31 (0)511 46 72 22  
fax +31 (0)511 46 42 59

info@damen-bergum.nl  
www.damen-bergum.nl