

DAMEN COMBI FREIGHTER® 3850

M.V. "CAROLIN G."

GENERAL

YARD NUMBER 9371

November 2008

BASIC FUNCTIONS Transport of bulk, steel coils, containers,

forest products, general cargo, etc. Lloyds Register № 100 A1, № LMC, UMS, SCM Equipped for dangerous goods according

to SOLAS reg. 54 II2, excl. Class I and VII. Strengthened for heavy cargo up to 15 t/m²

9462500 IMO NO.

DIMENSIONS

CLASSIFICATION

LENGTH O.A.	88.60	m
LENGTH B.P.P.	84.99	m
BEAM MLD.	12.67	m
DEPTH	7.00	m
BALLAST DRAFT	3.20	m
SUMMERDRAFT	5.42	m
DEADWEIGHT	3.783	ton
GROSS TONNIAGE	2 545	ton

CAPACITIES

HOLD CAPACITIES	5.250 156	m ³ (185.400 cuft)
GAS OII	55	m ³
GAS OIL	• • •	•••
LUB.OIL CLEAN	8.6	m ³
DIRTY OIL	4	m^3
SLUDGE	4	m^3
SEWAGE	12	m^3
POTABLE WATER	55	m^3
BALLAST WATER	1.375	m^3
	400	T-11
CONTAINER CAP. IN HOLD	108	TEU
CONTAINER CAP. ON DECK	80	TEU
TOTAL NUMBER	188	TEU

PERFORMANCES

Trial speed at ballast draft and 1.520 kW output: 12.3 knots

NAUTICAL AND COMMUNICATION EQUIPMENT

Radio equipment is according to GMDSS for area A3

PROPULSION SYSTEM

MAIN ENGINE 1x MAK, type 8M 20 C, running on HFO fuel (IFO 180)

1520 kW at 1000 rpm OUTPUT

PROPELLER 1x CPP, 2600 mm

BOW THRUSTER FPP, 220 kW, electrically driven

HATCHES

Weatherdeck hatches dim. approx. 62,70 x 10,10 m Steel pontoon hatches with gantry crane

AUXILIARY EQUIPMENT

1 Shaft generator, 330 kVA-50Hz

1 Diesel generator set, Sisu, 175 kVA-50 Hz

1 Emergency/harbour generator set, Sisu, 77 kVA-50Hz

2 starting air compressors

1 HFO separator

1 LO separator 1 GO separator

1 Booster-unit

2 Fuel oil trim pimps

1 Bilge water separator, acc. To Marpol regulations

2 General service pumps, each 150 m³/hr at 2,3 bar

1 Fire fighting pump

1 Freshwater pressure set

1 CO₂ fire fighting system for engine room and cargo hold

1 steering gear unit

DECK LAY-OUT AND EQUIPMENT

1 Elec. driven bow anchor winch with two warping heads

1 Elec. driven capstan aft

Rudder, fishtail type

Container fittings in tanktop and on hatch covers Lashing eyes in hold and on outside of coaming 2 Moveable grain bulkheads with 8 stowage positions

Electrically driven hold ventilation for 6 air changes per hour


ACCOMMODATION

For captain and crew for a total of 8 persons with heating, ventilation and air-conditioning

MANAGING OWNER

Reederei Gerdes Gruppe, Haren



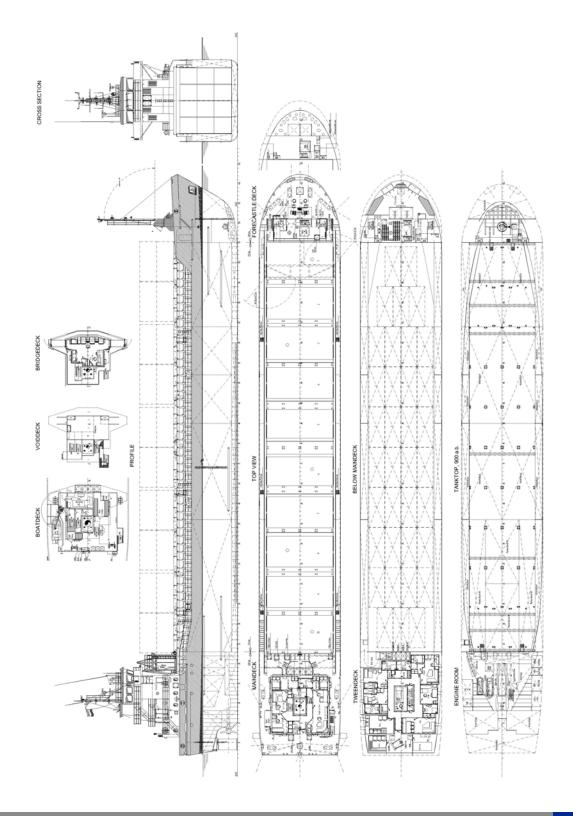

DAMEN COMBI FREIGHTER® 3850 M.V. "CAROLIN G."



DAMEN SHIPYARDS BERGUM

Member of the DAMEN SHIPYARDS GROUP

