



DAMEN CUTTER SUCTION DREDGER 500

GENERAL

YARD NO.	B10.0624 – YN561531
TYPE	CSD500
DELIVERY DATE	April, 2011
BASIC FUNCTIONS	Capital mining and maintenance dredging

DREDGING FEATURES

DREDGING DEPTH	-14 m
MIXTURE CAPACITY	4000 m ³ /h

DREDGE INSTALLATION

DREDGE PUMP TYPE	BP5045
DIAM. SUCTION/DISCHARGE PIPE	550/500 mm
CUTTER TYPE	5-1625 (with changeable chisels)
CUTTER POWER	180 kW

ENGINE INSTALLATION

DREDGE PUMP DIESEL	Caterpillar 3512B
CONTINUOUS POWER RATING	954 kW @ 1600 rpm
AUXILIARY DIESEL	Caterpillar 3406-DITA JWAC
PRIME POWER RATING	345 kW @ 1800 rpm
HYDRAULIC INSTALLATION	Driving cutter, winches and spuds
ELECTRICAL INSTALLATION	24 Volt DC and 230/400 Volt AC, 34 kVA

PRINCIPAL DIMENSIONS

LENTH O.A. INCL. LADDER	50.00 m
LENGTH OVER PONTOONS	36.50 m
BEAM	7.95 m
DRAUGHT	1.30 m
AIR DRAUGHT	6.70 m
TOTAL WEIGHT	178 ton

TANK CAPACITIES

FUEL OIL APPROX.	22.0 m ³
BALLAST WATER (FORE AND AFT)	4x8.7 m ³
HYDRAULIC OIL	2.5 m ³

DECK MACHINERY

LADDER WINCH	Hydraulic, 120 kN, 0-15 m/min
SWING WINCHES (2X)	Hydraulic, 120 kN, 0-15 m/min
SPUDS (2X)	Ø 610 mm, length 19 m
SPUD HOISTING (2X)	Hydraulic cylinder, stroke 1500 mm

DREDGING INSTRUMENTATION

- Dredging depth indicator
- Vacuum and pressure indication of dredge pump

REMARKABLE FEATURES

- Dismountable design
- Heavy duty robust design
- Scantlings well in excess of class regulations
- Spacious ergonomic designed control cabin and engine room
- Simultaneous operation of all functions possible
- Operators cabin with air conditioning


PROVIDED OPTIONS

- Anchor boom installation
- Jibcrane
- Non return valve

OWNER

Ministry of Water Resources, Iraq

DAMEN

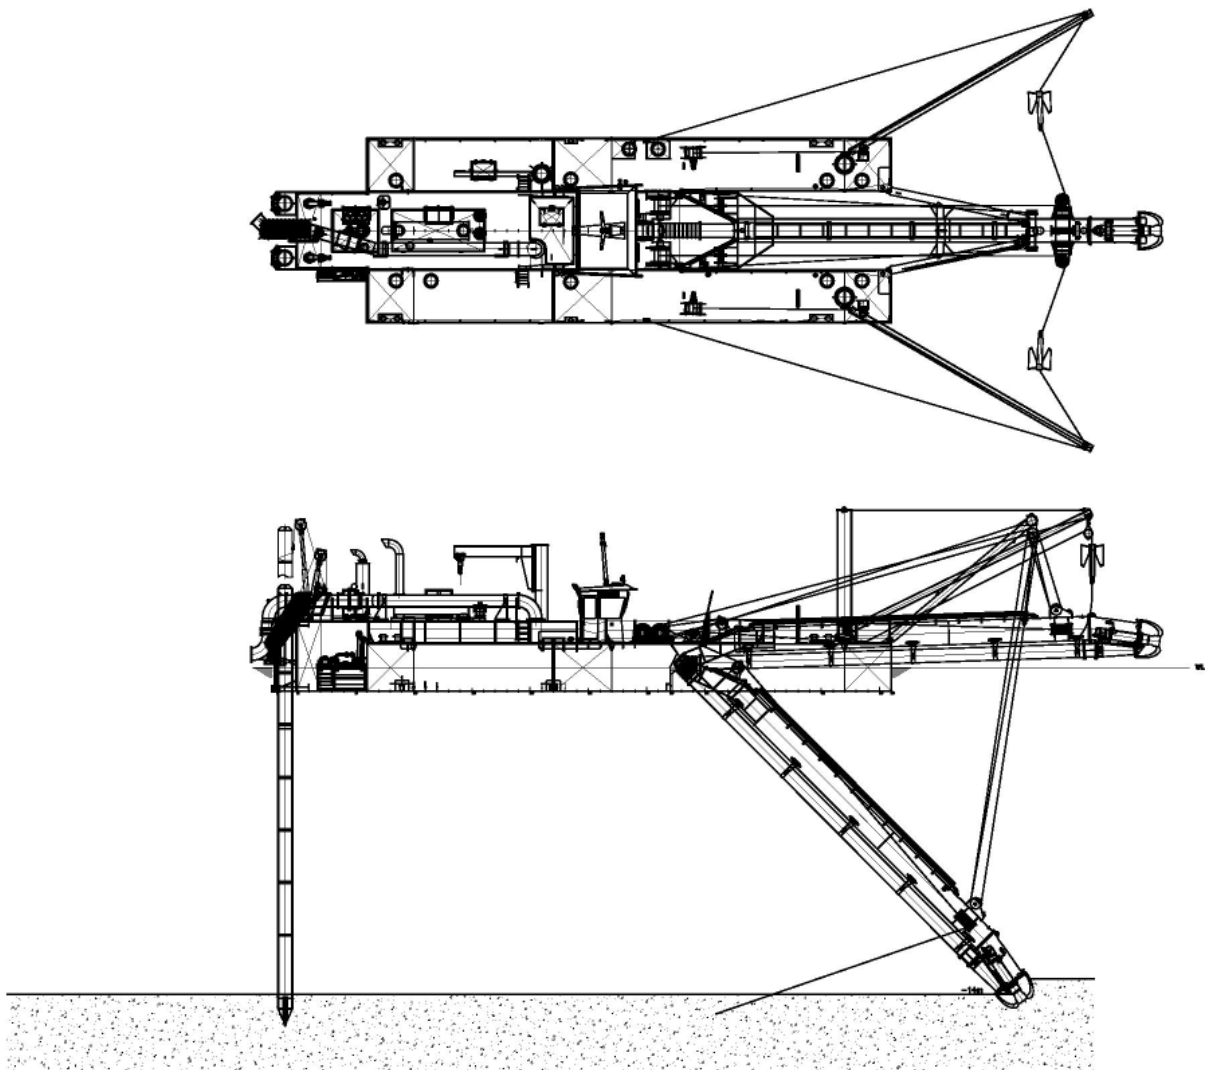

DAMEN CUTTER SUCTION DREDGER 500

DAMEN

DAMEN DREDGING EQUIPMENT

Member of the DAMEN SHIPYARDS GROUP



Edisonstraat 32
3861 NE Nijkerk

P.O. Box 1021
3860 BA Nijkerk
The Netherlands

phone +31 (0)33 247 40 40
fax +31 (0)33 247 40 60

info@damendredging.com
www.damendredging.com