

# DOP DREDGER 250

## PICTURE OF SIMILAR VESSEL

### GENERAL

Type	DD 250
Basic functions	Capital mining and maintenance dredging

### DREDGING FEATURES

Max. dredging depth	-20m
Max. mixture capacity	1,250 m <sup>3</sup> /h
Max. total head	5.3 bar

### DREDGE INSTALLATION

Dredge pump type	BP2525MD
Max. power at pump shaft	195 kW
Diameter suction/discharge pipe	250 mm
Spherical passage pump	130 mm
Cutter type	Crown model (with serrated edge)
Cutter power	28 kW
Cutter diameter	910 mm

### HYDRAULIC POWER PACK

Hydraulic flow max.	630 L/min
Hydraulic pressure max.	275 bar
Hydraulic installation	Driving DOP250, cutter and winches

### PRINCIPAL DIMENSIONS

Length o.a.	31.60 m
Length over pontoons	23.40 m
Beam o.a.	7.35 m
Depth	1.80 m
Draught	1.30 m
Air draught	5.90 m
Total weight	68 tons

### TANK CAPACITIES

Fuel oil approx.	5.00 m <sup>3</sup>
------------------	---------------------

### DECK MACHINERY

Hoisting winch	Hydraulic, 50 kN, 0-15 m/min
Maneuvering winches (4x)	Hydraulic, 40 kN, 0-15 m/min


### INSTRUMENTATION

Dredging depth indicator	
Vacuum and pressure indication of dredge pump	

### REMARKABLE FEATURES

- Dismountable design which allows transport by road
- Spacious ergonomic designed control cabin
- One operator can control the entire dredger from the control cabin
- Transportable in standard Open Top Containers

# DOP DREDGER 250

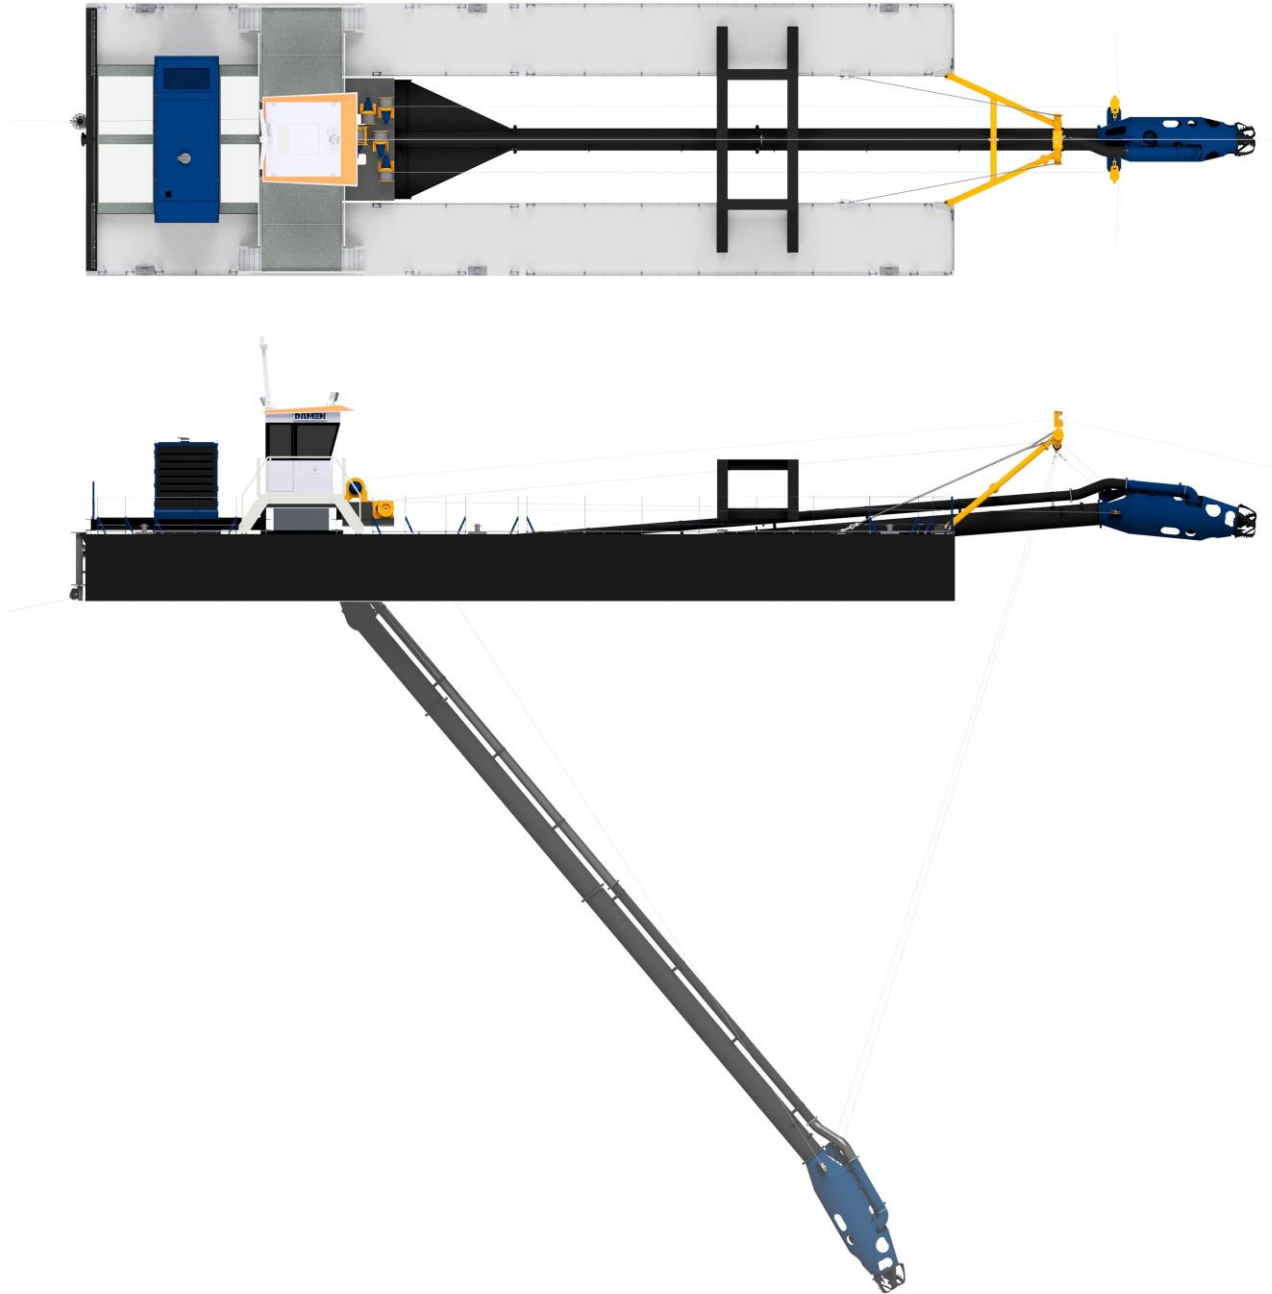

**DAMEN**

DAMEN SHIPYARDS GROUP

Avelingen-West 20  
4202 MS Gorinchem  
The Netherlands

P.O. Box 1  
4200 AA Gorinchem  
The Netherlands

phone +31 (0)183 63 99 22  
fax +31 (0)183 63 21 89

info@damen.com  
www.damen.com

© No part of the leaflet may be reproduced in any form, by print, photo print, microfilm, or any other means, without written permission from Damen Shipyards Group