

Stan Pilot 1605 FRP - propeller

STANDARD



PICTURE OF SIMILAR VESSEL

GENERAL

Hull material	FRP
Superstructure	FRP
Basic functions	Pilot duties

DIMENSIONS

Length overall	15.7 m
Beam overall	4.8 m
Depth at side	2.0 m
Draught max	1.2 m
Crew	Up to 2 persons
Pilots	Up to 6 persons

TANK CAPACITIES

Fuel oil	1.8 m ³
Fresh water	0.3 m ³
Sewage	0.3 m ³

PERFORMANCES

Speed	27.0 kn
Range at max speed	200 nm

PROPULSION SYSTEM

Main engines	2x Volvo D13
Total Power	882 bkW
Gearboxes	2x Twin Disc V-drive
Propulsion	2x Fixed pitch propeller

ELECTRICAL EQUIPMENT

Network	24V dc, 230V 50 Hz a.c.
Generator sets	1x 9.5 ekW

DECK LAY-OUT

Anchor equipment	1x Fortress, chain and line
Fendering	D-fender 190x200 all around

SHIP SYSTEMS

General service pump	1x electrically driven
Engine room ventilation	5.300 m ³ /hr
Fire extinguishing	Hand operated fire extinguishers. Fixed fire-fighting system in engine room

ACCOMMODATION

Main deck	Seats for pilots
Lower deck	Bunks, settee, pantry and sanitary space
Air conditioning	31.500 BTU/hr

NAUTICAL AND COMMUNICATION EQUIPMENT

Searchlight	1x
Radar	1x
Chart plotter	1x
GPS	1x
AIS	1x
Compass	1x Magnetic
Echo sounder	1x
VHF	1x
EPIRB	1x
SART	1x


OPTIONAL

Classification	Bureau Veritas I ✶ Hull •MACH Light Ship / Pilot Boat / Sea Area 3
External communication	GMDSS A1
Second generator	9.5 ekW
Domestic network	115v, 60Hz
Extra airconditioning	1 extra unit 10,500 BTU/hr each
MOB recovery system	Electric
Extra pilot seat	2 seats for in total 6 pilots
Shower	
Second searchlight	
Second radar	
Heading sensor	


Stan Pilot 1605 FRP - propeller




STANDARD

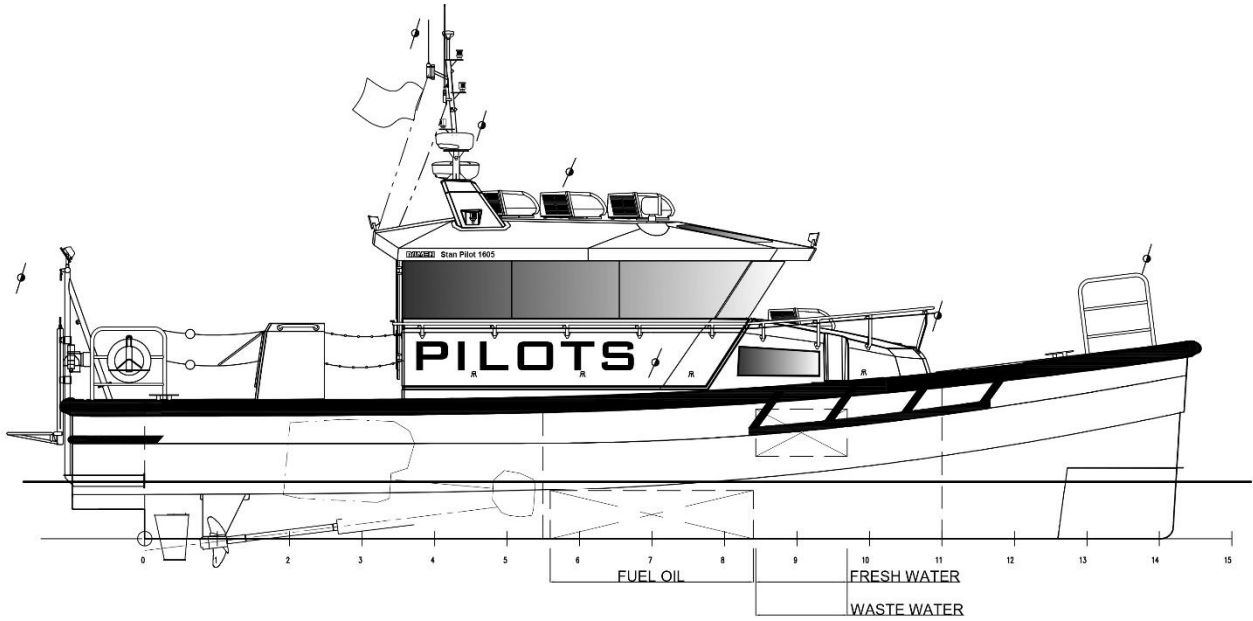

Profile

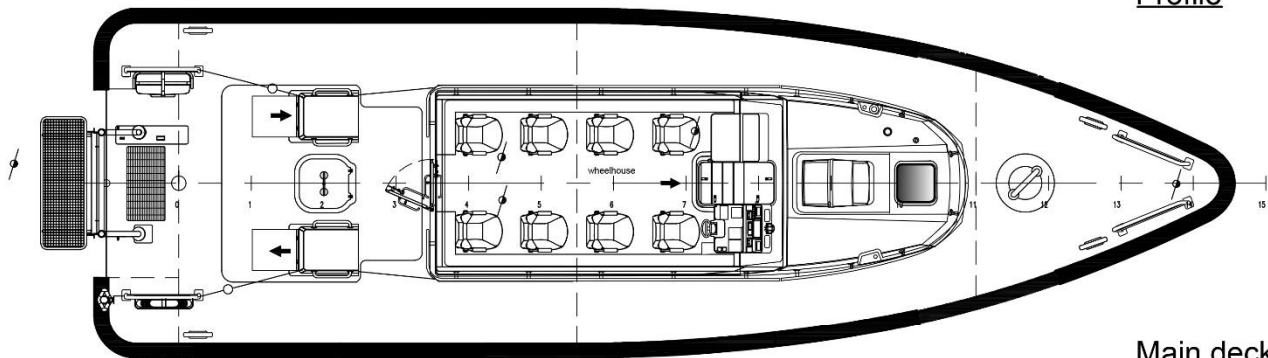

Main deck

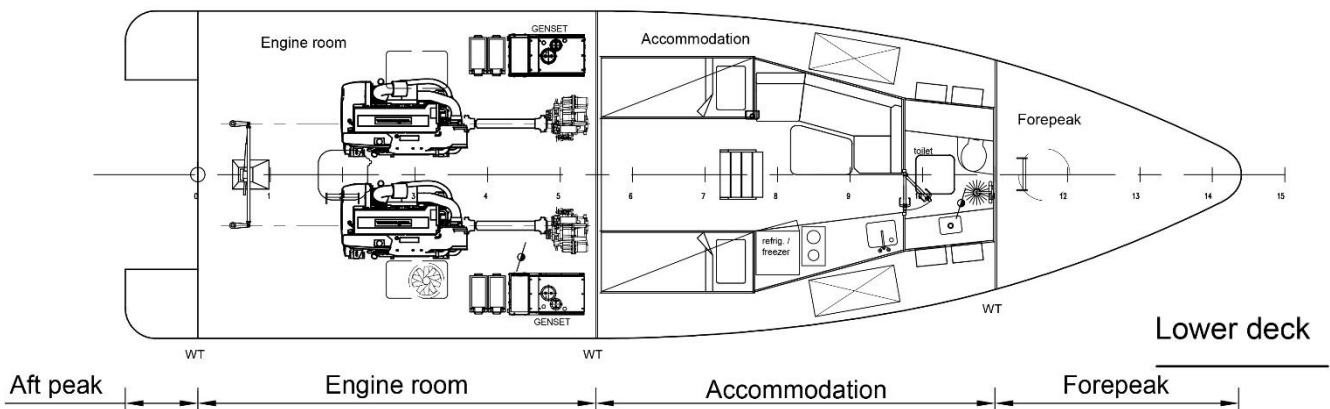

Lower deck

DAMEN

Damen.com

© No part of the leaflet may be reproduced in any form, by print, photoprint, microfilm, or any other means, without written permission from Damen Shipyards Group