



DAMEN STAN PONTON® 2404

"YN 522301-08"

GENERAL

YARD NUMBERS	522301-08
DELIVERY DATE	May 2016
TYPICAL APPLICATIONS	Jetty for mooring of ferries and embarkation of passengers
TYPICAL OPERATION AREA	Harbours, Inland waters
OWNER	Société Transport Lagunaire
COUNTRY	Ivory Coast

DIMENSIONS

LENGTH MOULDED	23,90 m
BEAM MOULDED	4,00 m
DEPTH MOULDED	1,00 m
DRAUGHT	0,30 m

CAPACITIES


DECK PLATING	8 mm
SHELL PLATING	6 mm
BULK HEADS	6 mm
OPEN FRAMES	6 mm
BOTTOM PLATING	6 mm
PROFILES	HP 120 x 8 mm

STANDARD EXECUTION

LIFTING EYES	4 pcs. for hoisting the pontoon
ANCHOR EYES	4 pcs. for fastening the concrete anchors
MANHOLES	Flush bolted manhole in the main deck, round type with a clear opening of 470 mm
RAILINGS	Removable stanchions and -railing
FENDERS	Hard wooden fenders, approx. 250x150 mm, bolt connected between strips of 100x8 mm.
BOLLARDS	4 double bollards are provided one on each corner
PAINT	Underwater area with anti-fouling

EQUIPMENT

ANCHOR	4 concrete anchor blocks with anchor chain and D-shackles. Dimensions anchors each approx.: 1,5 m x 1,5 m x 0,4 m and weight 2000 kg
RAMP	1 ramp: length 9.0 meter, width 2,2 meter, steel galvanized, ramp flooring is of aluminum tear plates

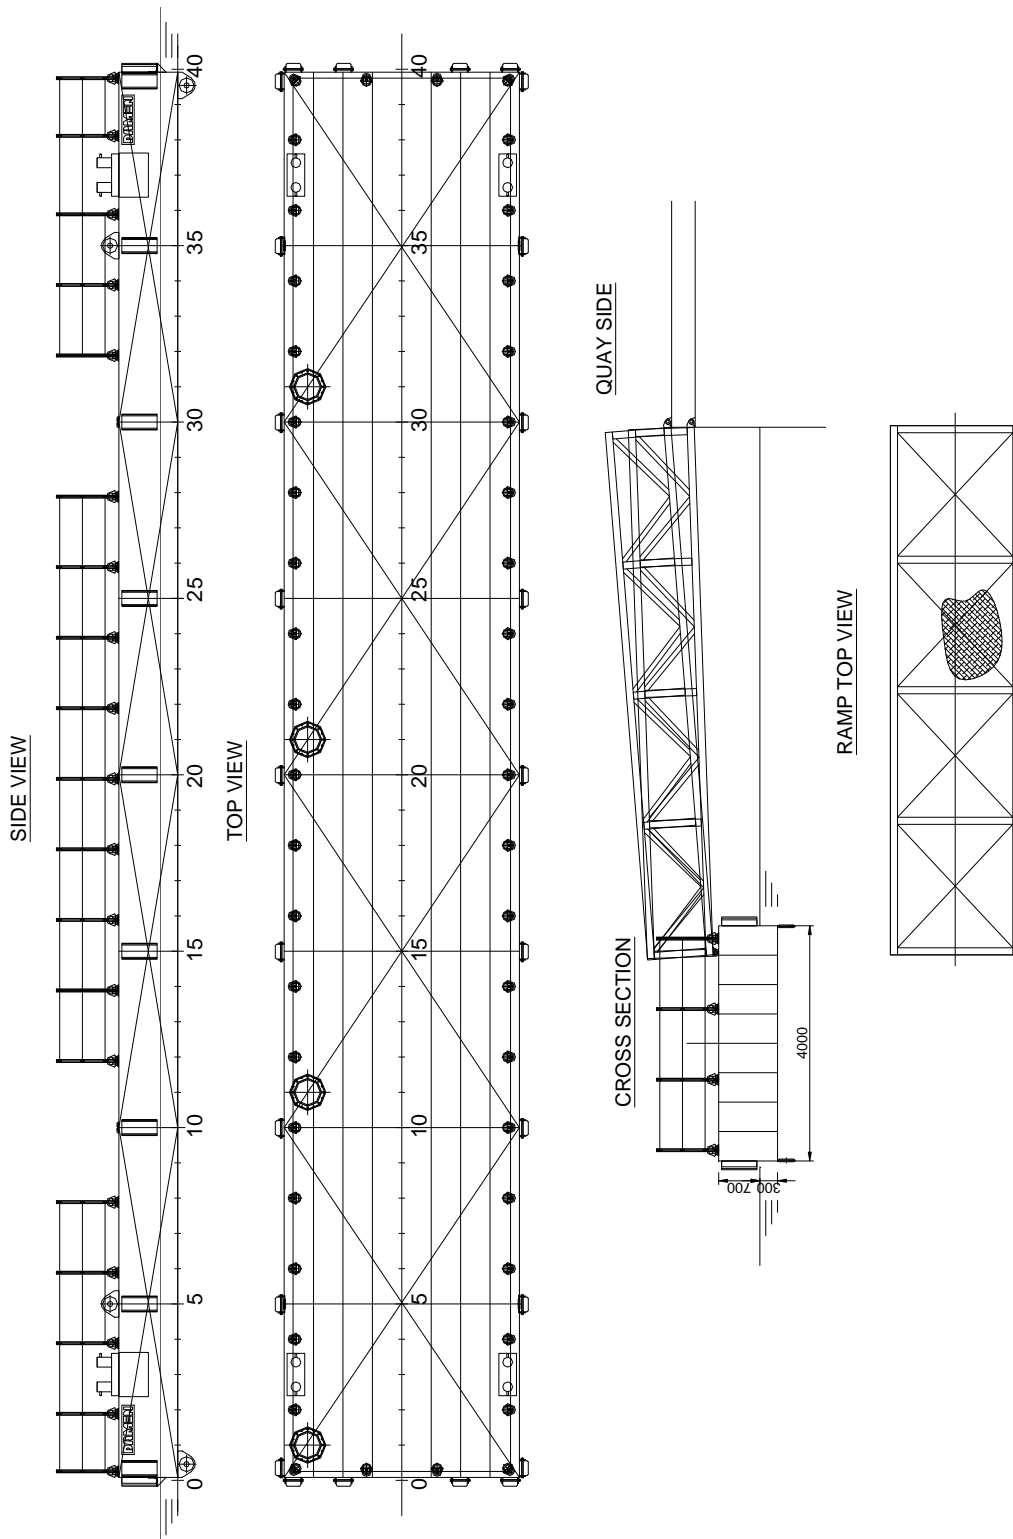

DAMEN STAN PONTOON[®] 2404

"YN 522301-08"

DAMEN

DAMEN SHIPYARDS GORINCHEM

Member of the DAMEN SHIPYARDS GROUP



Industrieterrein Avelingen West 20
4202 MS Gorinchem

P.O. Box 1
4200 AA Gorinchem
The Netherlands

phone +31 (0)183 63 99 11
fax +31 (0)183 63 21 89

info@damen.com
www.damen.com