



## DAMEN COMBI FREIGHTER<sup>®</sup> 3850

M.V. "HEINZ G."

### GENERAL

YARD NUMBER	9401
DELIVERY DATE	January 2011
BASIC FUNCTIONS	Transport of bulk, steel coils, containers, forest products, general cargo, etc.
CLASSIFICATION	Lloyds Register ✕ 100 A1, ✕ LMC, UMS, SCM Equipped for dangerous goods according to SOLAS reg. 54 II2, excl. Class I and VII. Strengthened for heavy cargo up to 15 t/m <sup>2</sup>
IMO NO.	9536521

### DIMENSIONS

LENGTH O.A.	88.60	m
LENGTH B.P.P.	84.99	m
BEAM MLD.	12.50	m
DEPTH	7.00	m
BALLAST DRAFT	3.20	m
SUMMERDRAFT	5.42	m
DEADWEIGHT	3.800	ton
GROSS TONNAGE	2.545	ton

### CAPACITIES

HOLD CAPACITIES	5.250	m <sup>3</sup> (185.400 cuft)
HFO	156	m <sup>3</sup>
GAS OIL	55	m <sup>3</sup>
LUB.OIL CLEAN	8.6	m <sup>3</sup>
DIRTY OIL	4	m <sup>3</sup>
SLUDGE	4	m <sup>3</sup>
SEWAGE	12	m <sup>3</sup>
POTABLE WATER	55	m <sup>3</sup>
BALLAST WATER	1.375	m <sup>3</sup>

CONTAINER CAP. IN HOLD	108	TEU
CONTAINER CAP. ON DECK	80	TEU
TOTAL NUMBER	188	TEU

### PERFORMANCES

Trial speed at ballast draft and 1.520 kW output: 12.3 knots

### NAUTICAL AND COMMUNICATION EQUIPMENT

Radio equipment is according to GMDSS for area A3

### PROPULSION SYSTEM

MAIN ENGINE	1x MAK, type 8M 20 C, running on HFO fuel (IFO 380)
OUTPUT	1520 kW at 1000 rpm
PROPELLER	1x CPP, 2600 mm
BOW THRUSTER	FPP, 220 kW, electrically driven

### HATCHES

Weatherdeck hatches dim. approx. 62,70 x 10,10 m  
Steel pontoon hatches with gantry crane

### AUXILIARY EQUIPMENT

- 1 Shaft generator, 330 kVA-50Hz
- 1 Diesel generator set, Sisu, 175 kVA-50 Hz
- 1 Emergency/harbour generator set, Sisu, 77 kVA-50Hz
- 2 starting air compressors
- 1 HFO separator
- 1 LO separator
- 1 GO separator
- 1 Booster-unit
- 2 Fuel oil trim pimps
- 1 Bilge water separator, acc. To Marpol regulations
- 2 General service pumps, each 150 m<sup>3</sup>/hr at 2,3 bar
- 1 Fire fighting pump
- 1 Freshwater pressure set
- 1 CO<sub>2</sub> fire fighting system for engine room and cargo hold
- 1 steering gear unit

### DECK LAY-OUT AND EQUIPMENT

- 1 Elec. driven bow anchor winch with two warping heads
- 1 Elec. driven capstan aft
- Rudder, fishtail type
- Container fittings in tanktop and on hatch covers
- Lashing eyes in hold and on outside of coaming
- 2 Moveable grain bulkheads with 8 stowage positions
- Electrically driven hold ventilation for 6 air changes per hour


### ACCOMMODATION

For captain and crew for a total of 8 persons with heating, ventilation and air-conditioning

### MANAGING OWNER

Gerdas Ship Management, Wedde (NL)

**DAMEN**

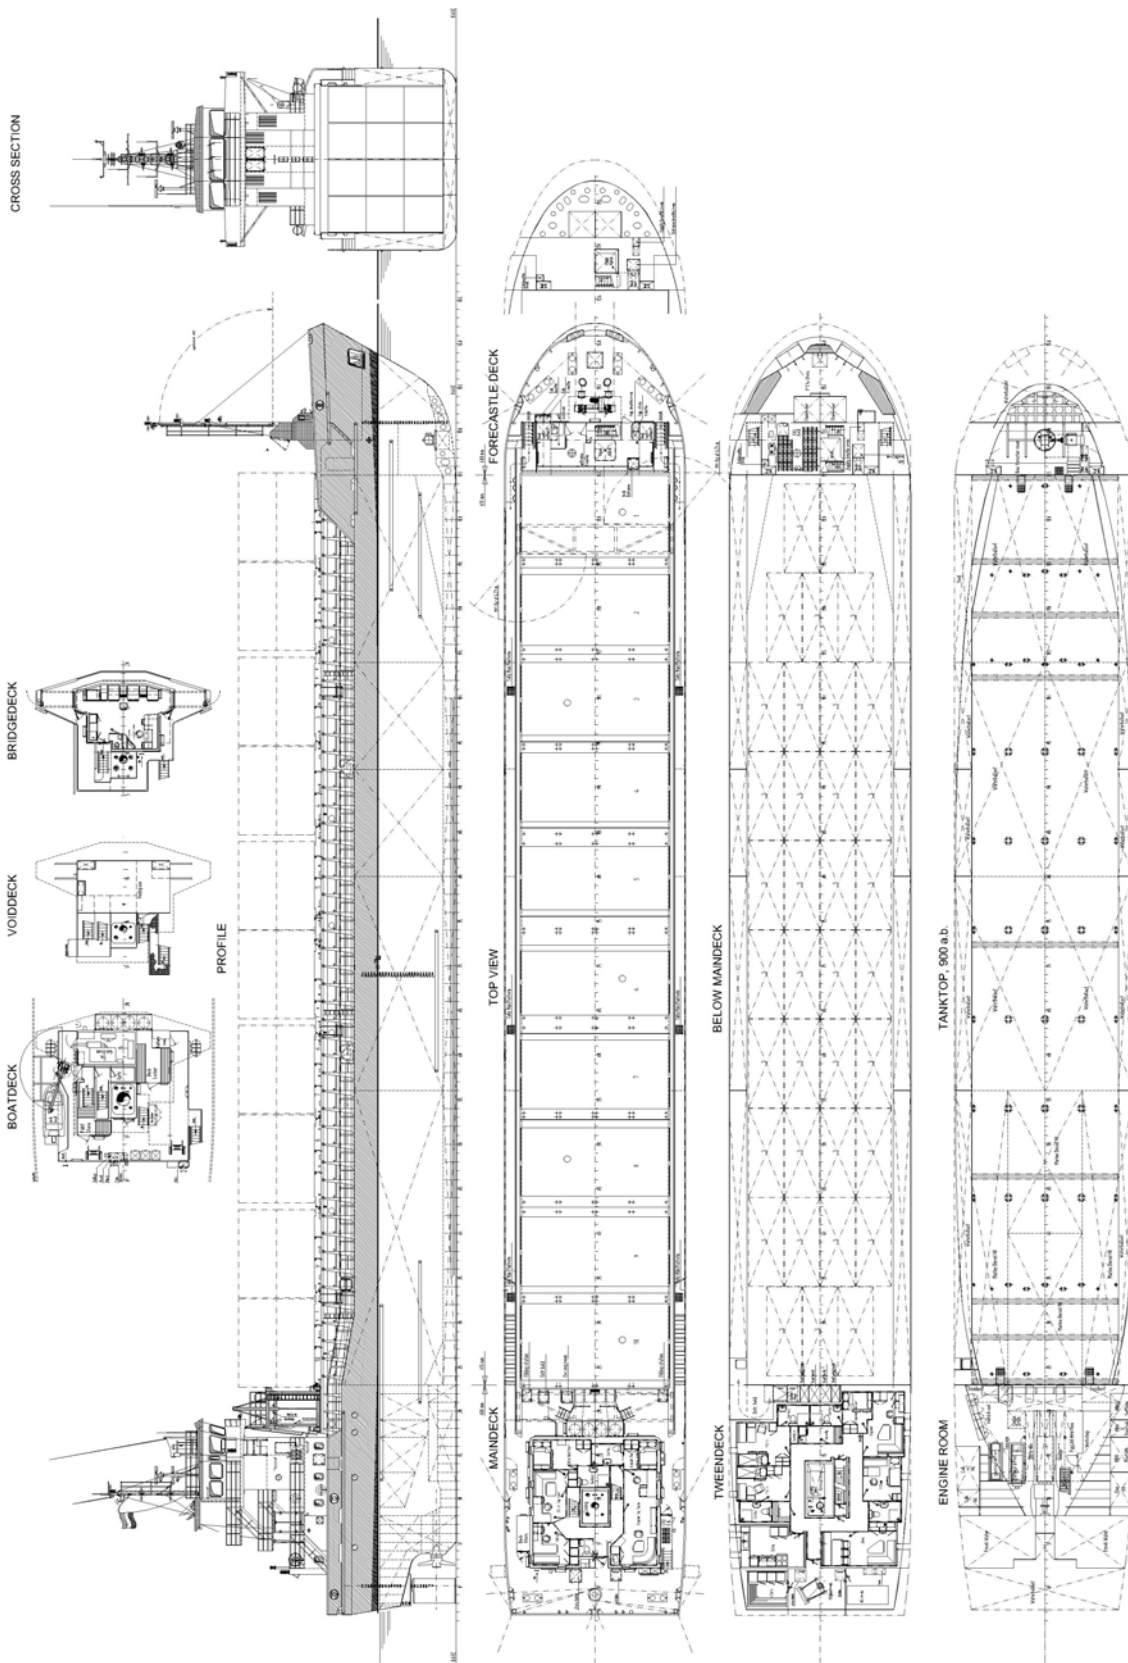

# DAMEN COMBI FREIGHTER® 3850

M.V. "HEINZ G."

**DAMEN**

DAMEN SHIPYARDS BERGUM

Member of the DAMEN SHIPYARDS GROUP



Damsingel 4 (Industrieterrein Zuid)  
9262 NC Suameer

P.O. Box 7  
9250 AA Bergum  
The Netherlands

phone +31 (0)511 46 72 22  
fax +31 (0)511 46 42 59

info@damen-bergum.nl  
www.damen-bergum.nl