



# STAN PATROL 5009

## STANDARD



### GENERAL

Hull material	Steel
Superstructure material	Aluminium
Basic functions	Patrol duties, maritime safety, securing economical waters, search and rescue
Classification	Bureau Veritas I ✱ Hull • MACH • AUT UMS Light Ship / Fast Patrol Boat Sea Area 4

### DIMENSIONS

Length overall	50.1 m
Beam overall	9.4 m
Depth at side	4.3 m
Draught max	3.5 m
Gross tonnage	479
Crew	Up to 28 persons

### TANK CAPACITIES

Fuel oil	60.8 m <sup>3</sup>
Fresh water	26.6 m <sup>3</sup>
Waste water (black)	9.3 m <sup>3</sup>
Waste water (grey)	9.4 m <sup>3</sup>
Bilge water / dirty oil	4.9 m <sup>3</sup>

### PERFORMANCES

Speed	Up to 29.5 kn
Range at cruising speed (12kn)	Up to 2,900 nm

### PROPULSION SYSTEM

Main engines	4x Caterpillar / MTU
Total Power	Up to 9,400 bkW
Gearboxes	4x Reintjes WVS-series
Propulsion	4x fixed pitch propellers
Bow thruster	2x 110 ekW electrically driven

### ELECTRICAL EQUIPMENT

Network	24V DC, 230V/400V 50Hz AC
Generator sets	3x 150 ekW

### DECK LAY-OUT

Anchor equipment	1x HHP Pool TW, chain, electric winch
Slipway	

### SHIP SYSTEMS

Ship systems are according to Class	
Fuel filtration	1x non-self-cleaning dynamic separator
Engine room ventilation	2x extraction fans, up to 70,000 m <sup>3</sup> /hr total capacity
Air conditioning	Up to 470,000 BTU/hr
Fire extinguishing	Novec 1230 in engine room
Roll reduction	Hydraulically driven stabilizer fins

### ACCOMMODATION

Bridge deck	Wheelhouse
Main deck	Cabins, sanitary spaces, galley, mess rooms, stores, wet gear room
Lower deck	Cabins, sanitary spaces, stores

### NAUTICAL AND COMMUNICATION EQUIPMENT

Integrated nav system	1x
Searchlight	1x
Radar	1x X-band, 1x S-band (HS)
Electronic Chart	Single ECDIS
GPS	1x
AIS	1x
Compass	1x Magnetic, 1x gyro
Autopilot	1x
Echo sounder	1x
Speed log	1x
Internal communication	Intercom and public address system
CCTV system	1x
External communications	GMDSS A2
Weather system	1x

### OPTIONAL


Flying bridge	
Bilge water separator	
Fresh water maker	
Sewage treatment plant	
Electrical network	110V / 440V 60 Hz AC
Foldable deck crane	
Slipway RHIB	7.5m, >30 knots
Davit(s)	With painterline boom
Interceptor(s)	Damen DI 1102, 54 knots
External fire-fighting	With foam
Second searchlight	
Electro Optical Systems	
External communication	GMDSS A3
Data communication	Iridium, Fleet Broadband, V-Sat
Military equipment/ballistic protection	
Alternative layout main deck or lower deck	

Note: Delivery of vessel and/or equipment may be export-controlled



# STAN PATROL 5009

## STANDARD

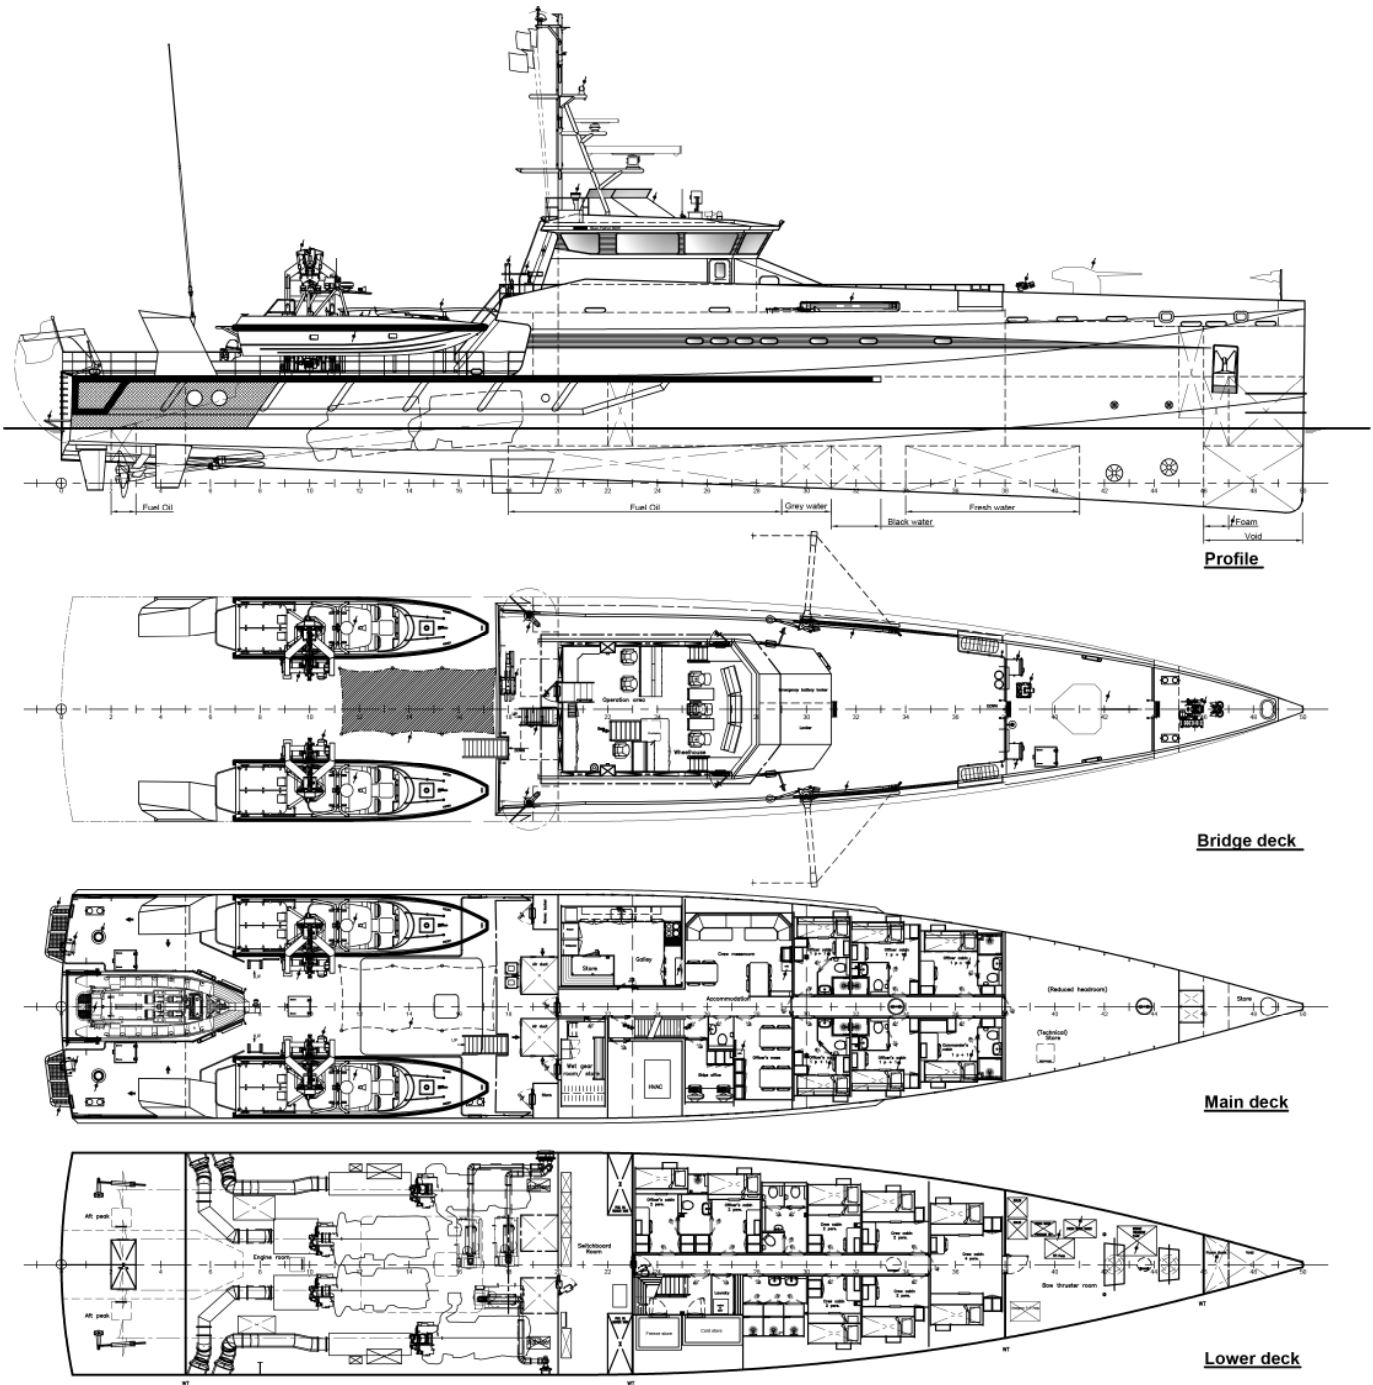

# DAMEN

Items marked with  are optional equipment

DAMEN SHIPYARDS GROUP

Avelingen-West 20  
4202 MS Gorinchem  
The Netherlands

P.O. Box 1  
4200 AA Gorinchem  
The Netherlands

phone +31 (0)183 63 99 22  
fax +31 (0)183 63 21 89

info@damen.com  
[www.damen.com](http://www.damen.com)

© No part of the leaflet may be reproduced in any form, by print, photo print, microfilm, or any other means, without written permission from Damen Shipyards Group